

FLEXIBLE LED RIBBONS 160LED/m - 21W/m



General features




Models	FLEXA
Voltage (V)	24
Number of LED/m	160
LED package	2835
Angle (°)	120
Secability (cm)	5
IP index	20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5

Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000367	21	2200	90+	3150
FLEXA-0000368	21	2700	95+	3255
FLEXA-0000369	21	3000	95+	3360
FLEXA-0000370	21	3500	95+	3465
FLEXA-0000371	21	4000	95+	3570
FLEXA-0000372	21	6000	95+	3570

Technical drawing

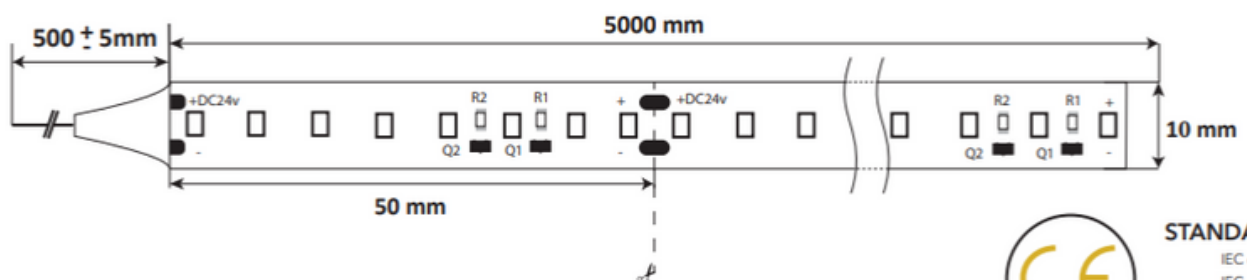

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2