

FLEXIBLE LED RIBBONS 60LED/m - 7.2W/m



General features




Models	FLEXA
Voltage (V)	24
Number of LED/m	60
LED package	2835
Angle (°)	120
Secability (cm)	10
IP index	20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	10

Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000188	7,2	3000	83	750
FLEXA-0000189	7,2	4000	83	790

Technical drawing

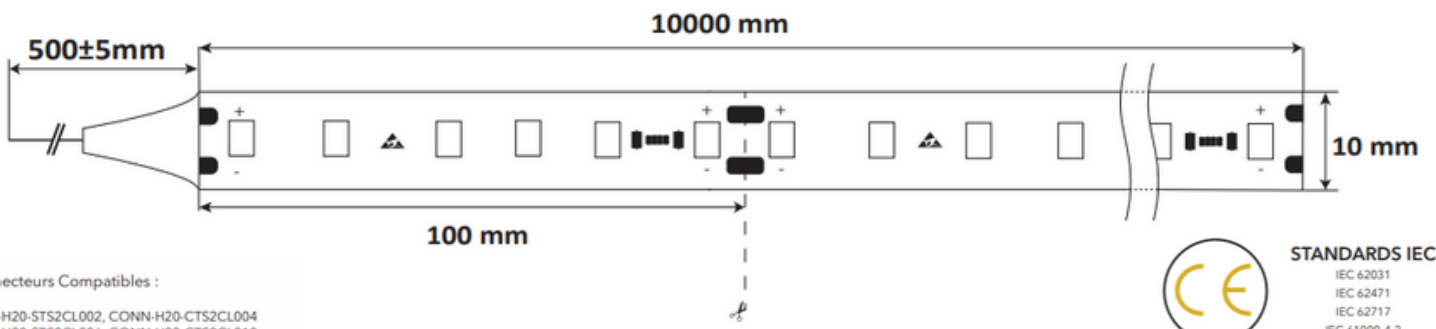

*Connecteurs Compatibles :

CONN-H20-ST52CL002, CONN-H20-CTS2CL004
CONN-H20-ST52CL006, CONN-H20-CTS2CL010



STANDARDS IEC

IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2