

FLEXIBLE LED RIBBONS 120LED/m - 9.6W/m



General features


Models	FLEXA
Voltage (V)	24
Number of LED/m	120
LED package	3528
Angle (°)	120
Secability (cm)	5
IP index	20
Width (mm)	8
Double-face adhesive	3M
Max. length in serie (m)	8



Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000003	9,6	3000	83	750
FLEXA-0000004	9,6	6000	83	840

Technical drawing

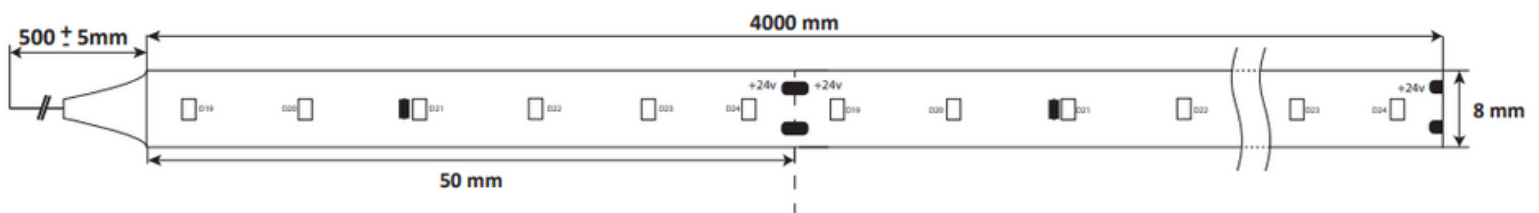

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2