

FLEXIBLE LED RIBBONS 120LED/m - 14.4W/m



General features


Models	FLEXA
Voltage (V)	24
Number of LED/m	120
LED package	2835
Angle (°)	120
Secability (cm)	5
IP index	20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	3



Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000190	14,4	3000	83	1620
FLEXA-0000191	14,4	4000	83	1650

Technical drawing

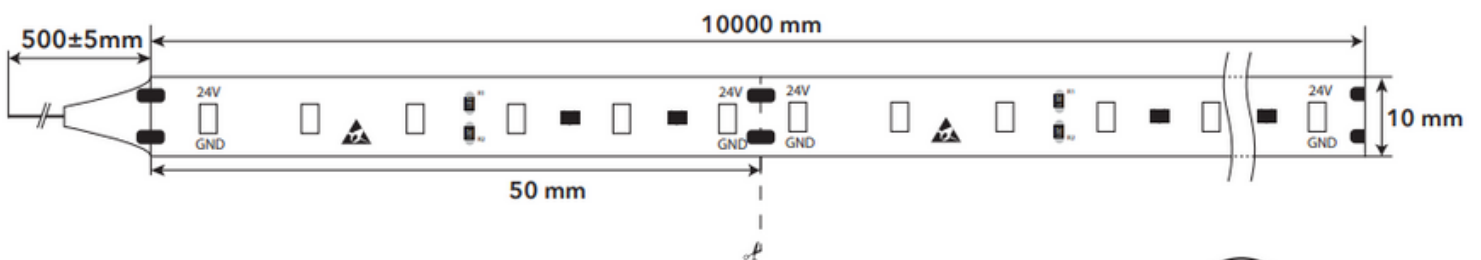

*Connecteurs Compatibles :

CONN-H20-CTS2CL004, CONN-H20-ST52CL006,
CONN-H20-CTS2CL010



STANDARDS IEC

IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2