

FLEXIBLE LED RIBBONS 240LED/m - 19.2W/m



General features


Models	FLEXA
Voltage (V)	24
Number of LED/m	240
LED package	2835
Angle (°)	120
Secability (cm)	2,5
IP index	20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5



Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000151	19,2	2000	92	1248
FLEXA-0000152	19,2	2200	92	1344
FLEXA-0000153	19,2	2400	92	1382
FLEXA-0000177	19,2	2700	92	1400
FLEXA-0000154	19,2	3000	92	1440
FLEXA-0000155	19,2	3500	92	1536
FLEXA-0000156	19,2	4000	92	1613
FLEXA-0000157	19,2	5700	92	1690

Technical drawing

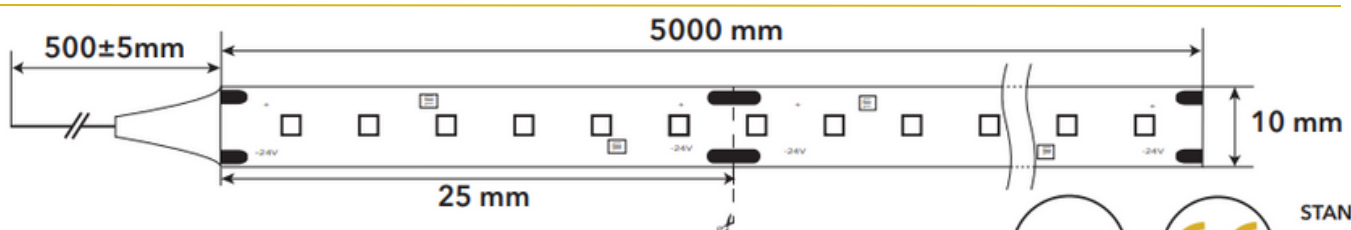

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2