

## FLEXIBLE LED RIBBONS 176LED/m - 7W/m



### General features




Models	FLEXA
Voltage (V)	24
Number of LED/m	176
LED package	2835
Angle (°)	120
Secability (cm)	4,55
IP index	20
Width (mm)	5
Double-face adhesive	3M
Max. length in serie (m)	5

### Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000343	7	2200	90+	1125
FLEXA-0000344	7	2700	95+	1155
FLEXA-0000345	7	3000	95+	1190
FLEXA-0000346	7	3500	95+	1225
FLEXA-0000347	7	4000	95+	1260
FLEXA-0000348	7	6000	95+	1260

### Technical drawing

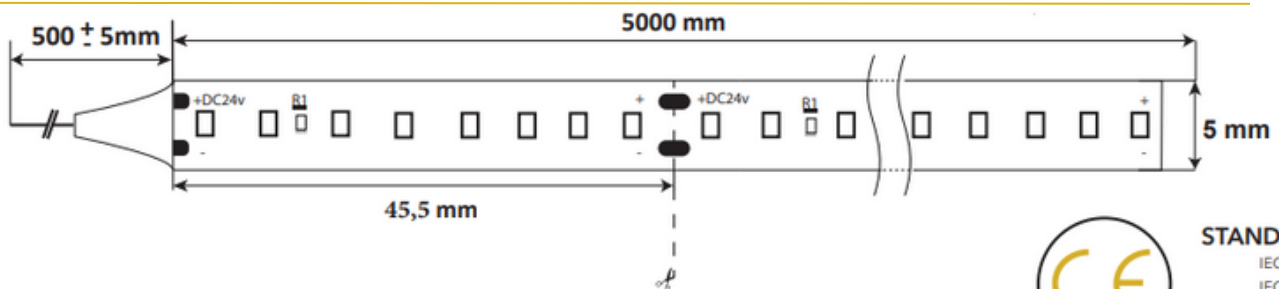

STANDARDS IEC  
IEC 62031  
IEC 62471  
IEC 62717  
IEC 61000-4-2