

COVE FLEX LED RIBBONS 60LED/m - 20W/m



General features




Models	FLEXA
Voltage (V)	24
Number of LED/m	60
LED package	6060
Angle (°)	170
Secability (cm)	3,3
IP index	20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5

Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000232	20	2700	83	1800
FLEXA-0000233	20	3000	83	1880
FLEXA-0000234	20	4000	83	1950
FLEXA-0000235	20	6000	83	1950

Technical drawing

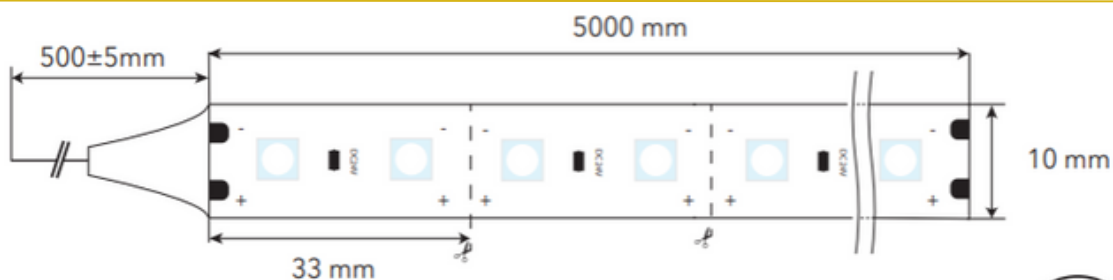

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2