

## FLEXIBLE LED RIBBONS 70LED/m - 7.2W/m



### General features


| Models                   | FLEXA |
|--------------------------|-------|
| Voltage (V)              | 24    |
| Number of LED/m          | 60    |
| LED package              | 3528  |
| Angle (°)                | 120   |
| Secability (cm)          | 10    |
| IP index                 | 20    |
| Width (mm)               | 8     |
| Double-face adhesive     | 3M    |
| Max. length in serie (m) | 5     |



### Photometric characteristics

| References     | Power (W/m) | Color (°K) | CRI | Flux (Lm/m) |
|----------------|-------------|------------|-----|-------------|
| FLEXAS-0000007 | 7,2         | 2700       | 90  | 500         |
| FLEXAS-0000008 | 7,2         | 3000       | 90  | 500         |
| FLEXAS-0000009 | 7,2         | 3500       | 90  | 500         |
| FLEXAS-0000010 | 7,2         | 4000       | 90  | 550         |
| FLEXAS-0000011 | 7,2         | 5000       | 90  | 600         |
| FLEXAS-0000012 | 7,2         | 6000       | 90  | 600         |

### Technical drawing

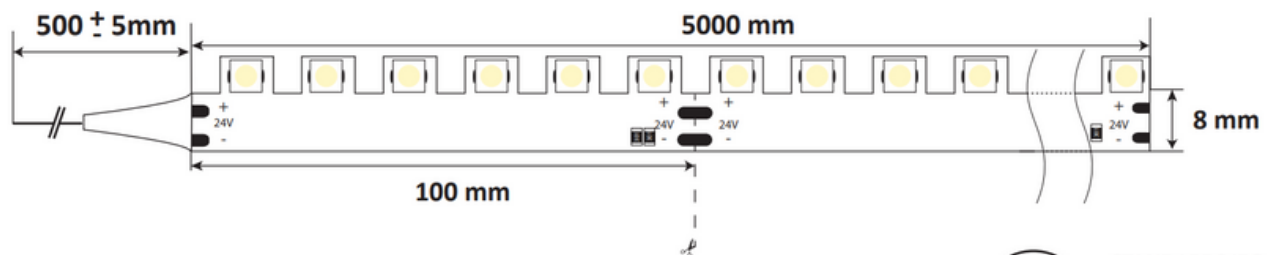

STANDARDS IEC  
IEC 62031  
IEC 62471  
IEC 62717  
IEC 61000-4-2