

## FLEXIBLE LED RIBBONS 120LED/m - 9,6W/m



### General features




Models	FLEXA
Voltage (V)	24
Number of LED/m	120
LED package	3528
Angle (°)	120
Secability (cm)	5
IP index	20
Width (mm)	8
Double-face adhesive	3M
Max. length in serie (m)	5

### Photometric characteristics

References	Power (W/m)	Color (°K)	Flux (Lm/m)
FLEXA-0000004	9,6	Rouge	200
FLEXA-0000005	9,6	Vert	430
FLEXA-0000006	9,6	Bleu	100

### Technical drawing

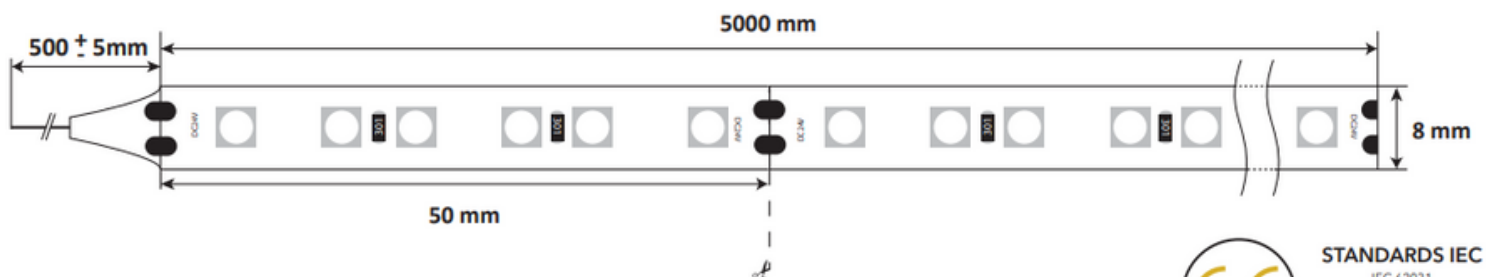

STANDARDS IEC  
IEC 62031  
IEC 62471  
IEC 62717  
IEC 61000-4-2