

## FLEXIBLE LED RIBBONS 240LED/m - 5W/m




### General features

Models	FLEXA
Voltage (V)	24
Number of LED/m	240
LED package	2216
Angle (°)	120
Secability (cm)	2,5
IP index	20
Width (mm)	5
Double-face adhesive	3M
Max. length in serie (m)	5

### Photometric characteristics

References	Power (W/m)	Color (°K)	Flux (Lm/m)
FLEXB-0000007	5	Red	60,8
FLEXB-0000008	5	Blue	159
FLEXB-0000009	5	Orange	69
FLEXB-0000010	5	Green	120
FLEXB-0000011	5	Yellow	43,8

### Technical drawing

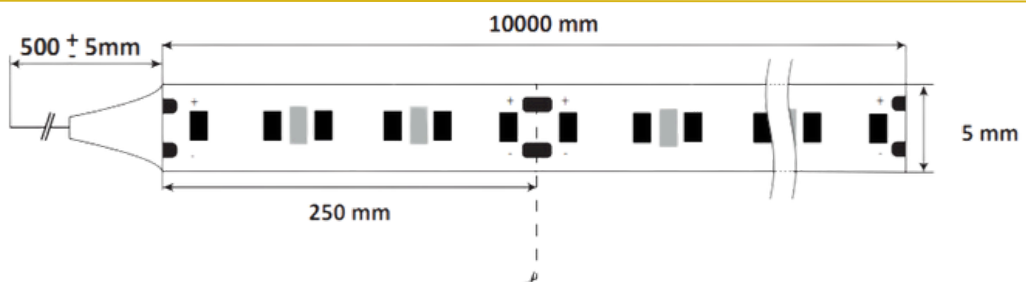

STANDARDS IEC  
IEC 62031  
IEC 62471  
IEC 62717  
IEC 61000-4-2