

FLEXIBLE LED RIBBONS 120LED/m - 18W/m



General features


Models	FLEXA
Voltage (V)	24
Number of LED/m	120
LED package	3528
Angle (°)	120
Secability (cm)	10
IP index	20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5



Photometric characteristics

References	Power (W/m)	Color CCT1/CCT2 (°K)	CRI	Flux CCT1/CCT2 (Lm/m)
FLEXC-0000007	18	3000/6000	80	840/920

Technical drawing

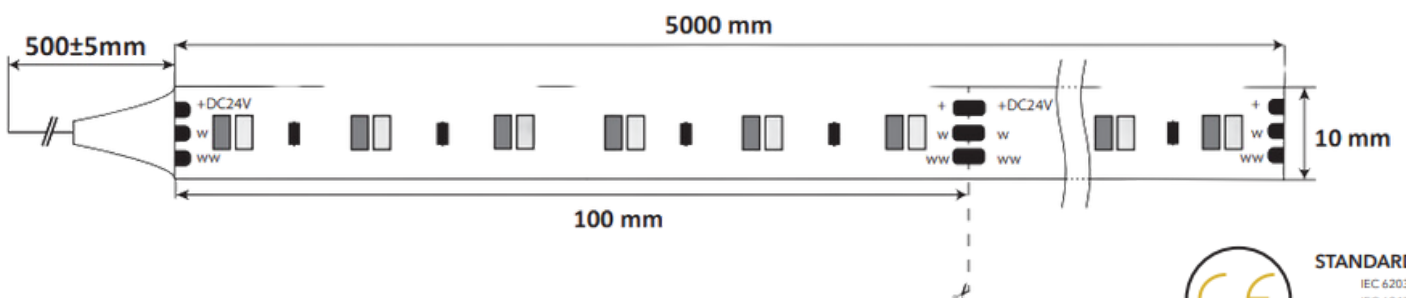

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2