

## FLEXIBLE LED RIBBONS 120LED/m - 10.5W/m



### General features




Models	FLEXA
Voltage (V)	24
Number of LED/m	120
LED package	2835
Angle (°)	120
Secability (cm)	5
IP index	20
Width (mm)	8
Double-face adhesive	3M
Max. length in serie (m)	5
Coil length (m)	5

### Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000226	10,5	2700	95	950
FLEXA-0000227	10,5	3000	95	980
FLEXA-0000228	10,5	4000	95	1030
FLEXA-0000229	10,5	5700	95	1080

### Technical drawing

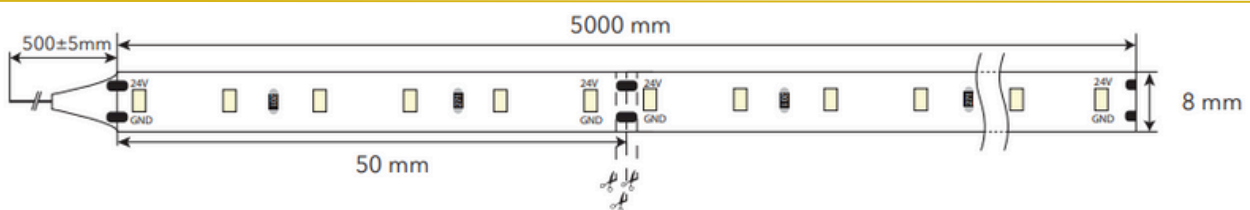

STANDARDS IEC  
IEC 62031  
IEC 62471  
IEC 62717  
IEC 61000-4-2