

FLEXIBLE LED RIBBONS 128LED/m - 5W/m



General features


Models	FLEXA
Voltage (V)	24
Number of LED/m	128
LED package	2835
Angle (°)	120
Secability (cm)	6,25
IP index	IP20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5



Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000302	5	2200	95+	600
FLEXA-0000303	5	2700	95+	620
FLEXA-0000304	5	3000	95+	630
FLEXA-0000305	5	3500	95+	635
FLEXA-0000306	5	4000	95+	640
FLEXA-0000307	5	5000	95+	640
FLEXA-0000308	5	6000	95+	640

Technical drawing

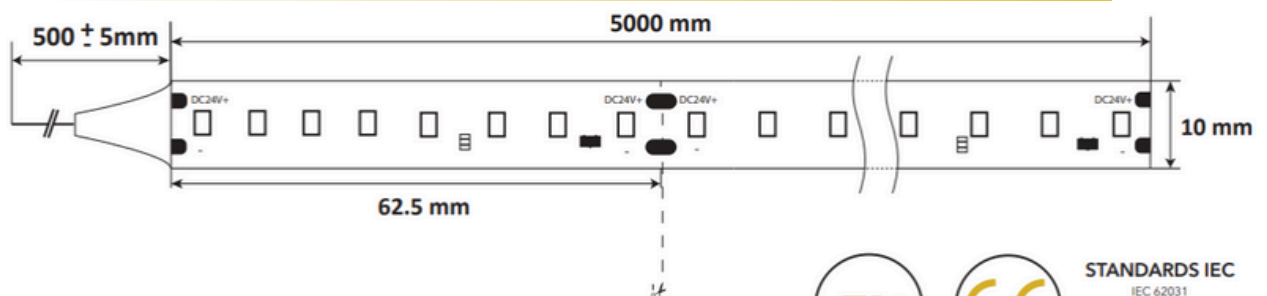

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2