

FLEXIBLE LED RIBBONS 128LED/m – 10W/m



General features


Models	FLEXA
Voltage (V)	24
Number of LED/m	128
LED package	2835
Angle (°)	120
Secability (cm)	6,25
IP index	IP20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5



Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000309	10	2200	95+	1200
FLEXA-0000310	10	2700	95+	1240
FLEXA-0000311	10	3000	95+	1260
FLEXA-0000312	10	3500	95+	1270
FLEXA-0000313	10	4000	95+	1280
FLEXA-0000314	10	5000	95+	1280
FLEXA-0000315	10	6000	95+	1280

Technical drawing

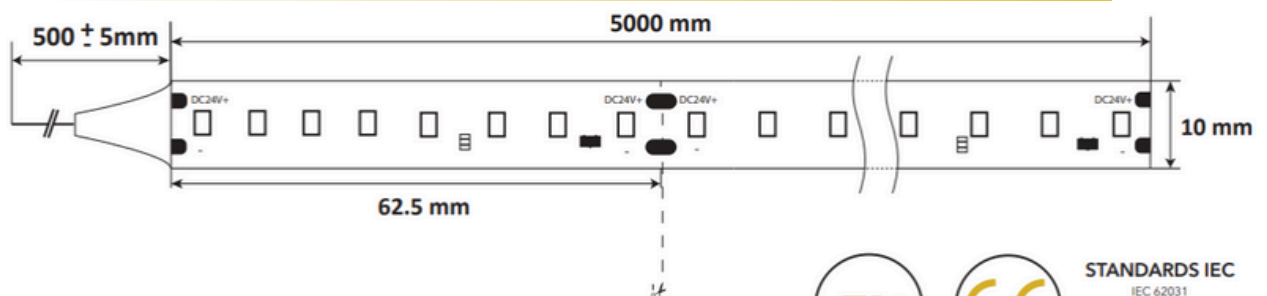

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2