

FLEXIBLE LED RIBBONS 128LED/m - 15.6W/m



General features


Models	FLEXA
Voltage (V)	24
Number of LED/m	128
LED package	2835
Angle (°)	120
Secability (cm)	6,25
IP index	IP20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5



Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000316	15,6	2200	95+	1872
FLEXA-0000317	15,6	2700	95+	1935
FLEXA-0000318	15,6	3000	95+	1965
FLEXA-0000319	15,6	3500	95+	1980
FLEXA-0000320	15,6	4000	95+	2000
FLEXA-0000321	15,6	5000	95+	2000
FLEXA-0000322	15,6	6000	95+	2000

Technical drawing

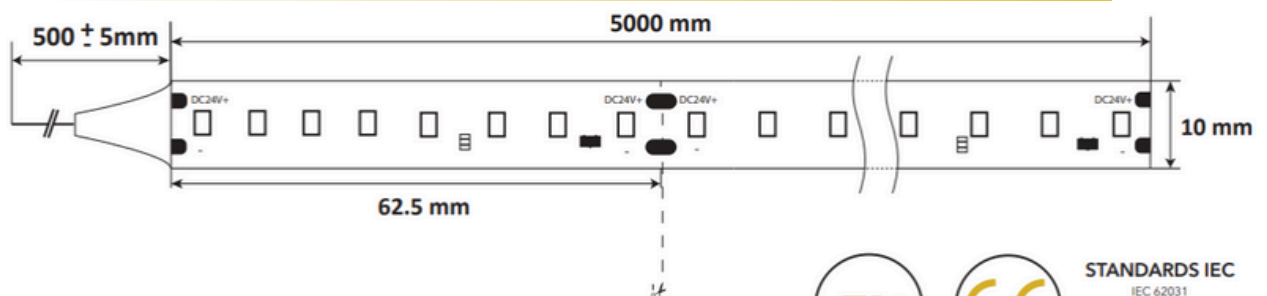

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2