

## FLEXIBLE LED RIBBONS 192LED/m - 19W/m



### General features




Models	FLEXA
Voltage (V)	24
Number of LED/m	192
LED package	2835
Angle (°)	120
Secability (cm)	4,17
IP index	20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5
Coil length (m)	3

### Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000326	19	2700	95+	2150
FLEXA-0000327	19	3000	95+	2210
FLEXA-0000328	19	3500	95+	2250
FLEXA-0000329	19	4000	95+	2300

### Technical drawing

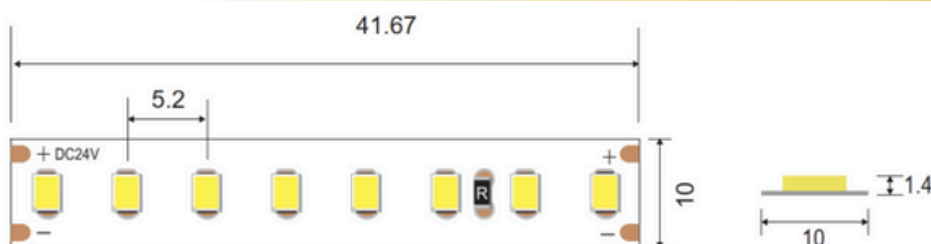

STANDARDS IEC  
IEC 62031  
IEC 62471  
IEC 62717  
IEC 61000-4-2