

FLEXIBLE LED RIBBONS 128LED/m - 5W/m



General features


Models	FLEXA
Voltage (V)	24
Number of LED/m	128
LED package	2835
Angle (°)	120
Secability (cm)	6,25
IP index	IP20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5



Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000281	5	2200	92	675
FLEXA-0000282	5	2700	92	690
FLEXA-0000283	5	3000	92	700
FLEXA-0000284	5	3500	92	710
FLEXA-0000285	5	4000	92	720
FLEXA-0000286	5	5000	92	720
FLEXA-0000287	5	6000	92	720

Technical drawing

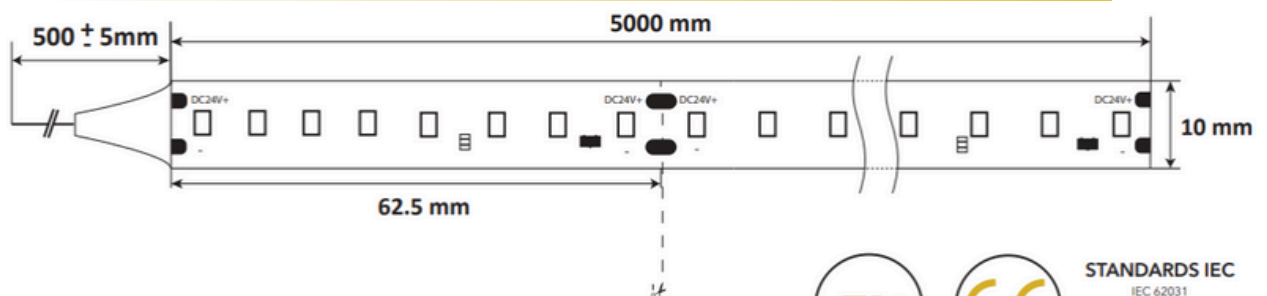

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2