

FLEXIBLE LED RIBBONS 128LED/m – 10W/m



General features


Models	FLEXA
Voltage (V)	24
Number of LED/m	128
LED package	2835
Angle (°)	120
Secability (cm)	6,25
IP index	IP20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5



Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)														
FLEXA-0000288	10	2200	92	1350														
FLEXA-0000289	10	2700	92	1380														
FLEXA-0000290	10	3000	92	1400														
FLEXA-0000291	10	3500	92 </tr <tr> <td>FLEXA-0000292</td> <td>10</td> <td>4000</td> <td>92</td> <td>1440</td> </tr> <tr> <td>FLEXA-0000293</td> <td>10</td> <td>5000</td> <td>92</td> <td>1440</td> </tr> <tr> <td>FLEXA-0000294</td> <td>10</td> <td>6000</td> <td>92</td> <td>1440</td> </tr>	FLEXA-0000292	10	4000	92	1440	FLEXA-0000293	10	5000	92	1440	FLEXA-0000294	10	6000	92	1440
FLEXA-0000292	10	4000	92	1440														
FLEXA-0000293	10	5000	92	1440														
FLEXA-0000294	10	6000	92	1440														

Technical drawing

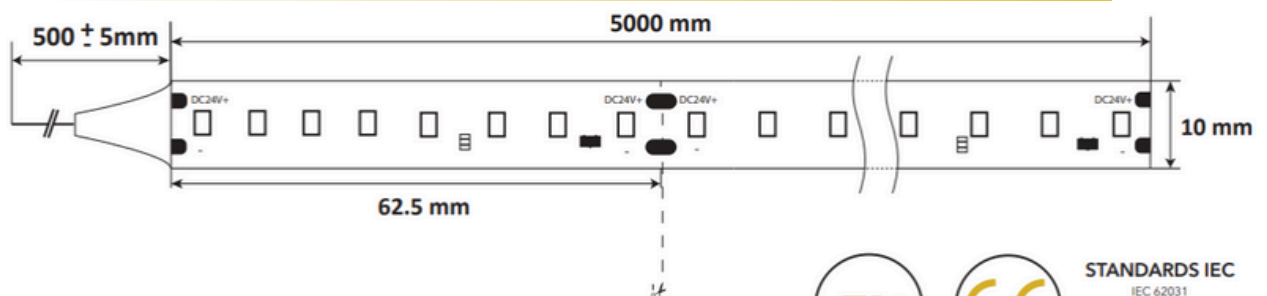

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2