

## FLEXIBLE LED RIBBONS 128LED/m - 15.6W/m



### General features


Models	FLEXA
Voltage (V)	24
Number of LED/m	128
LED package	2835
Angle (°)	120
Secability (cm)	6,25
IP index	IP20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5



### Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000295	15,6	2200	92	2105
FLEXA-0000296	15,6	2700	92	2150
FLEXA-0000297	15,6	3000	92	2180
FLEXA-0000298	15,6	3500	92	2215
FLEXA-0000299	15,6	4000	92	2250
FLEXA-0000300	15,6	5000	92	2250
FLEXA-0000301	15,6	6000	92	2250

### Technical drawing

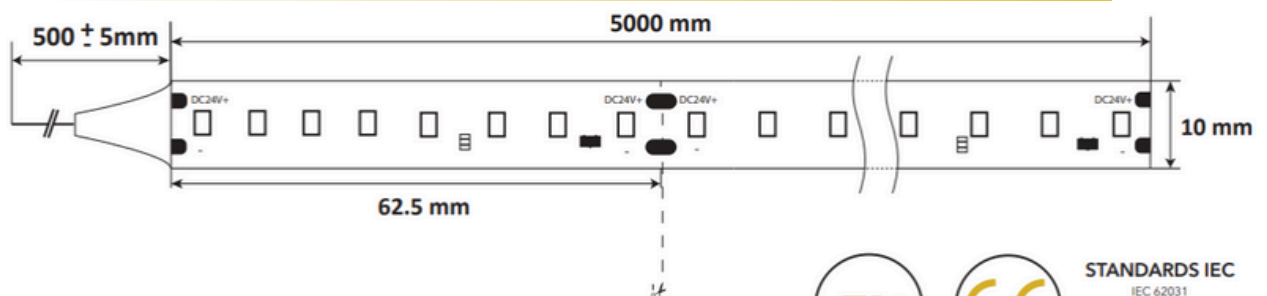

STANDARDS IEC  
IEC 62031  
IEC 62471  
IEC 62717  
IEC 61000-4-2