

FLEXIBLE LED RIBBONS 160LED/m - 21W/m



General features




Models	FLEXA
Voltage (V)	24
Number of LED/m	160
LED package	2835
Angle (°)	120
Secability (cm)	5
IP index	20
Width (mm)	12
Double-face adhesive	3M
Max. length in serie (m)	5

Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000220	21	2700	91	3550
FLEXA-0000221	21	3000	91	3675
FLEXA-0000222	21	3500	91	3750
FLEXA-0000223	21	4000	91	3850
FLEXA-0000224	21	6000	91	3990

Technical drawing

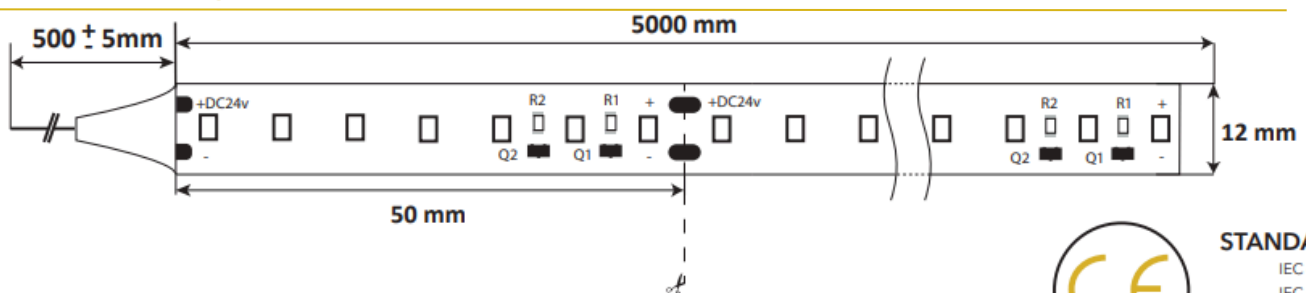

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2