

FLEXIBLE LED RIBBONS 240LED/m - 15W/m



General features


Models	FLEXA
Voltage (V)	24
Number of LED/m	240
LED package	2216
Angle (°)	120
Secability (cm)	2,5
IP index	20
Width (mm)	5
Double-face adhesive	3M
Coil length (m)	10
Max. length in serie (m)	3



Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000266	15	2400	93	920
FLEXA-0000215	15	2700	93	1000
FLEXA-0000216	15	3000	93	1100
FLEXA-0000217	15	3500	93	1150
FLEXA-0000218	15	4000	93	1250
FLEXA-0000219	15	6000	93	1350

Technical drawing

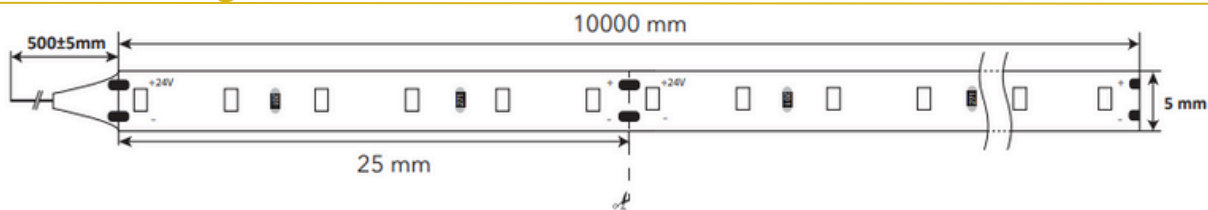

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2