

## COB FLEXIBLE LED RIBBONS - 10W/m



### General features




Models	FLEXA
Voltage (V)	24
Number of LED/m	480
LED package	COB
Angle (°)	140
Secability (cm)	5
IP index	20
Width (mm)	8
Double-face adhesive	3M
Max. length in serie (m)	5

### Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000236	10	2700	90	960
FLEXA-0000237	10	3000	90	1040
FLEXA-0000238	10	3500	90	1060
FLEXA-0000239	10	4000	90	1100
FLEXA-0000240	10	6500	90	1130

### Technical drawing

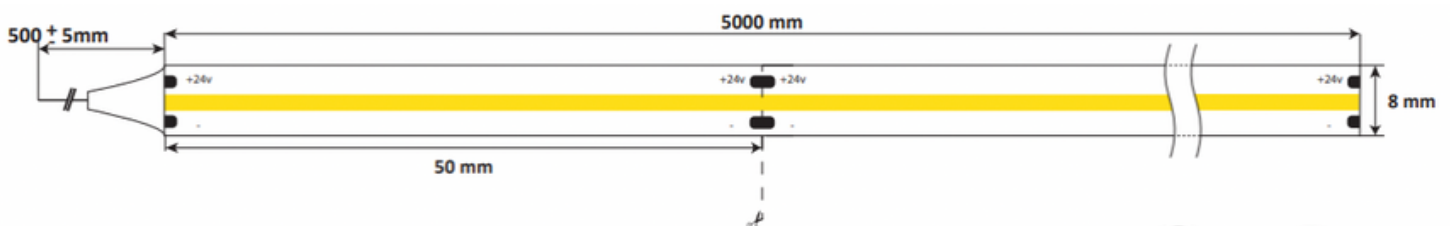

STANDARDS IEC  
IEC 62031  
IEC 62471  
IEC 62717  
IEC 61000-4-2