

## COB FLEXIBLE LED RIBBONS - 14W/m



### General features


Models	FLEXA
Voltage (V)	24
Number of LED/m	480
LED package	COB
Angle (°)	140
Secability (cm)	5
IP index	20
Width (mm)	8
Double-face adhesive	3M
Max. length in serie (m)	5



### Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000323	14	2200	90	1200
FLEXA-0000325	14	2400	90	1200
FLEXA-0000246	14	2700	90	1330
FLEXA-0000247	14	3000	90	1476
FLEXA-0000248	14	3500	90	1484
FLEXA-0000249	14	4000	90	1554
FLEXA-0000250	14	6500	90	1582

### Technical drawing

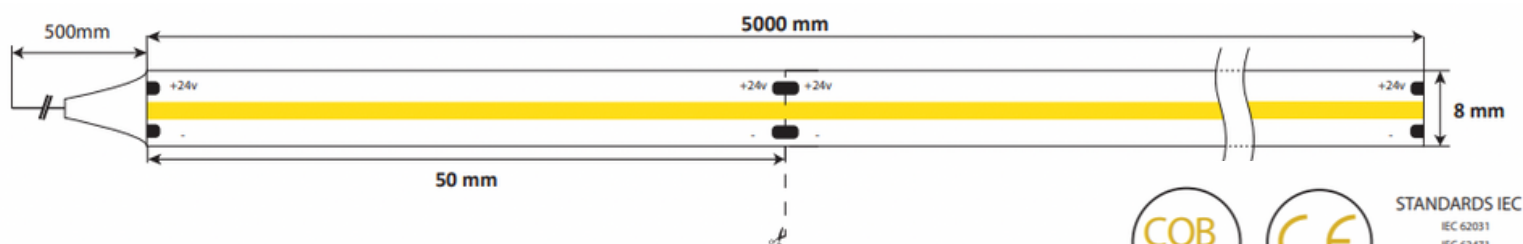

STANDARDS IEC  
IEC 62031  
IEC 62471  
IEC 62717  
IEC 61000-4-2