

COB FLEXIBLE LED RIBBONS - 18W/m



General features


Models	FLEXA
Voltage (V)	24
Number of LED/m	480
LED package	COB
Angle (°)	140
Secability (cm)	5
IP index	20
Width (mm)	8
Double-face adhesive	3M
Max. length in serie (m)	5



Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000256	18	2700	90	1692
FLEXA-0000257	18	3000	90	1872
FLEXA-0000258	18	3500	90	1890
FLEXA-0000259	18	4000	90	1980
FLEXA-0000260	18	6000	90	2016

Technical drawing

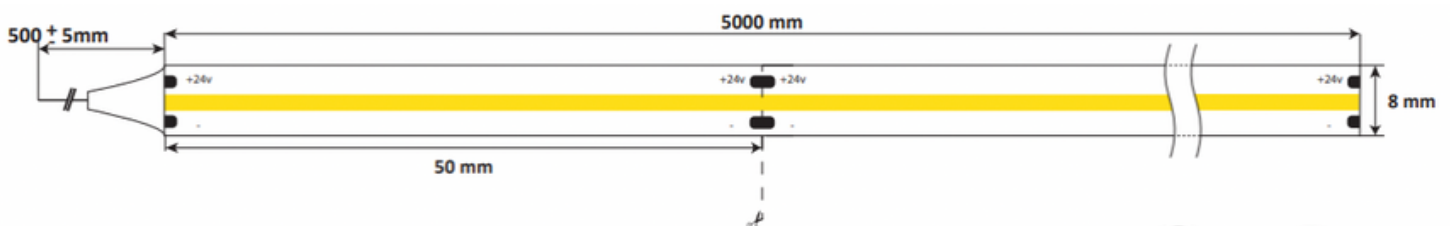

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2