

COB FLEXIBLE LED RIBBONS - 5W/m



General features


Models	FLEXA
Voltage (V)	24
Number of LED/m	480
LED package	COB
Angle (°)	140
Secability (cm)	5
IP index	20
Width (mm)	8
Double-face adhesive	3M
Max. length in serie (m)	5



Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000268	5	2700	90	480
FLEXA-0000269	5	3000	90	520
FLEXA-0000270	5	3500	90	530
FLEXA-0000271	5	4000	90	555
FLEXA-0000272	5	6000	90	565

Technical drawing

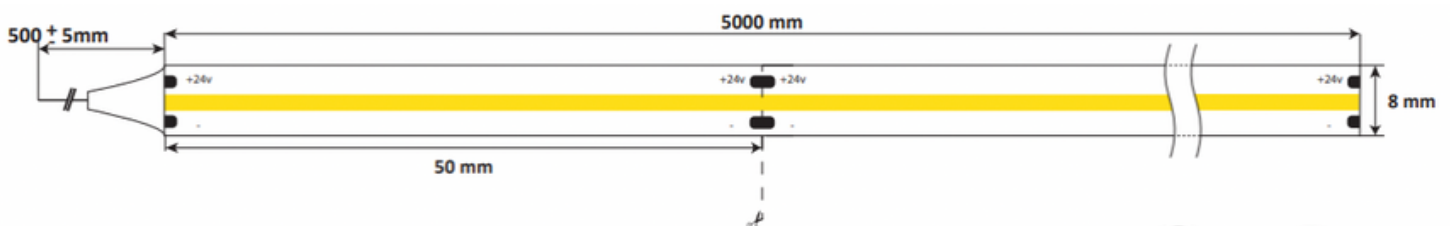

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2