

COB FLEXIBLE LED RIBBONS - 10W/m



General features




Models	FLEXA
Voltage (V)	24
Number of LED/m	480
LED package	COB
Angle (°)	140
Secability (cm)	4,5
IP index	20
Width (mm)	5
Double-face adhesive	3M
Max. length in serie (m)	3

Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000391	10	2700	90	940
FLEXA-0000392	10	3000	90	980
FLEXA-0000393	10	3500	90	1000

Technical drawing

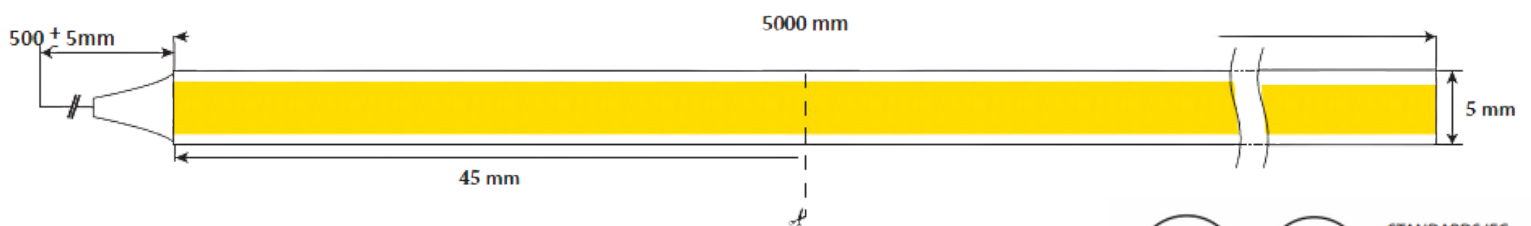

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2