


FLEXIBLE LED RIBBONS 60LED/m - 7.2W/m



General features

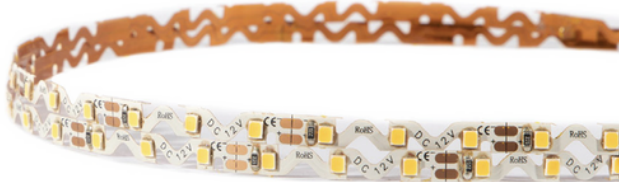


Models	FLEXAS
Voltage (V)	24
Number of LED/m	60
LED package	3528
Angle (°)	120
Secability (cm)	10
IP index	20
Width (mm)	8
Double-face adhesive	3M
Max. length in serie (m)	5

Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXAS-0000001	7,2	2700	90	500
FLEXAS-0000002	7,2	3000	90	500
FLEXAS-0000003	7,2	3500	90	500
FLEXAS-0000004	7,2	4000	90	550
FLEXAS-0000006	7,2	5000	90	600
FLEXAS-0000005	7,2	6000	90	600

Technical drawing

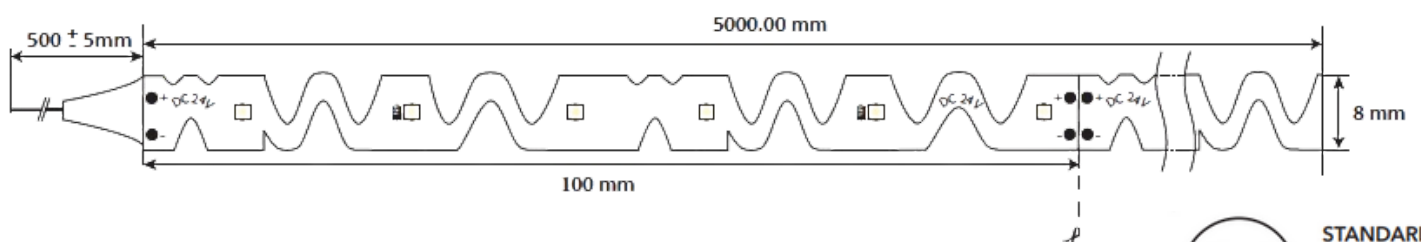

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2