

FLEXIBLE LED RIBBONS 80LED/m - 6W/m




General features



Models	FLEXA
Voltage (V)	24
Number of LED/m	80
LED package	2835
Angle (°)	120
Secability (cm)	10
IP index	65
Width (mm)	12
Double-face adhesive	3M
Max. length in serie (m)	10

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000336	6	2700	83	750
FLEXA-0000337	6	3000	83	780
FLEXA-0000338	6	4000	83	820

Technical drawing

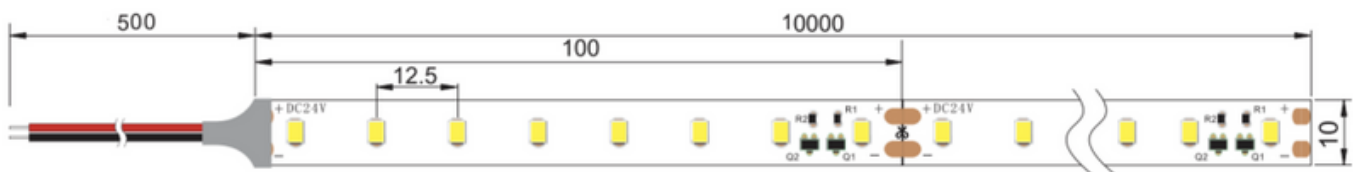

Largeur: 12mm avec silicone



STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2