

COB FLEXIBLE LED RIBBONS - 14W/m



General features


Models	FLEXA
Voltage (V)	24
Number of LED/m	480
LED package	COB
Angle (°)	140
Secability (cm)	5
IP index	65
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5



Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000251	14	2700	90	1260
FLEXA-0000252	14	3000	90	1400
FLEXA-0000253	14	3500	90	1414
FLEXA-0000254	14	4000	90	1414
FLEXA-0000255	14	6500	90	1512

Technical drawing

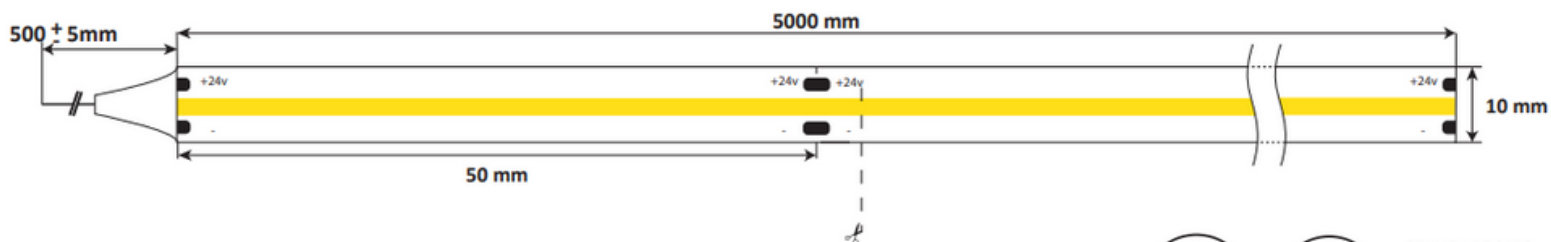

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2