

FLEXIBLE LED RIBBONS 240LED/m - 10W/m



General features




Models	FLEXA
Voltage (V)	24
Number of LED/m	240
LED package	2835
Angle (°)	120
Secability (cm)	3,33
IP index	20
Width (mm)	12
Double-face adhesive	3M
Max. length in serie (m)	5

Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000373	10	2200	90+	1590
FLEXA-0000374	10	2700	95+	1640
FLEXA-0000375	10	3000	95+	1690
FLEXA-0000376	10	3500	95+	1740
FLEXA-0000377	10	4000	95+	1790
FLEXA-0000378	10	6000	95+	1790

Technical drawing

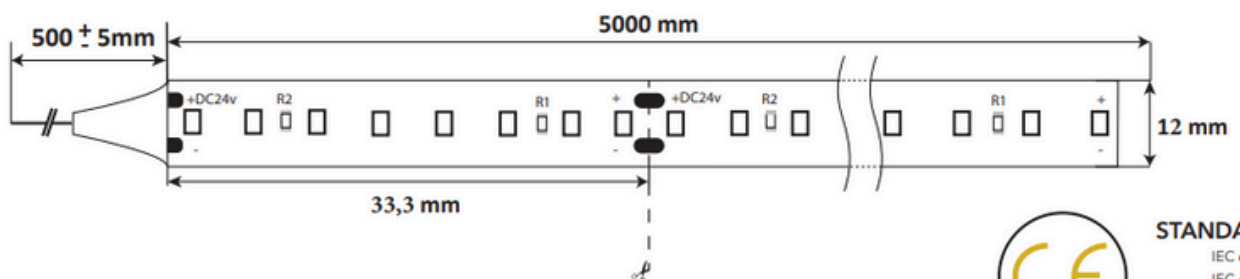

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2