


FLEXIBLE LED RIBBONS 240LED/m - 15W/m



General features

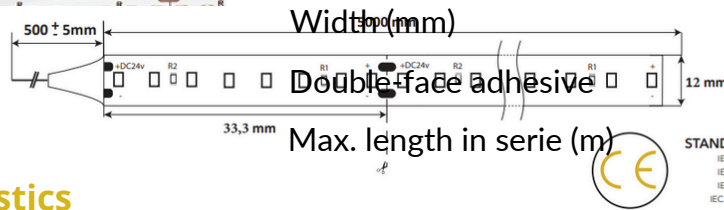


Models	FLEXA
Voltage (V)	24
Number of LED/m	240
LED package	2835
Angle (°)	120
Secability (cm)	3,33
IP index	20
Width (mm)	12
Double-face adhesive	3M
Max. length in serie (m)	5

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2

Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000379	15	2200	90+	2325
FLEXA-0000380	15	2700	95+	2400
FLEXA-0000381	15	3000	95+	2475
FLEXA-0000382	15	3500	95+	2550
FLEXA-0000383	15	4000	95+	2625
FLEXA-0000384	15	6000	95+	2625

Technical drawing

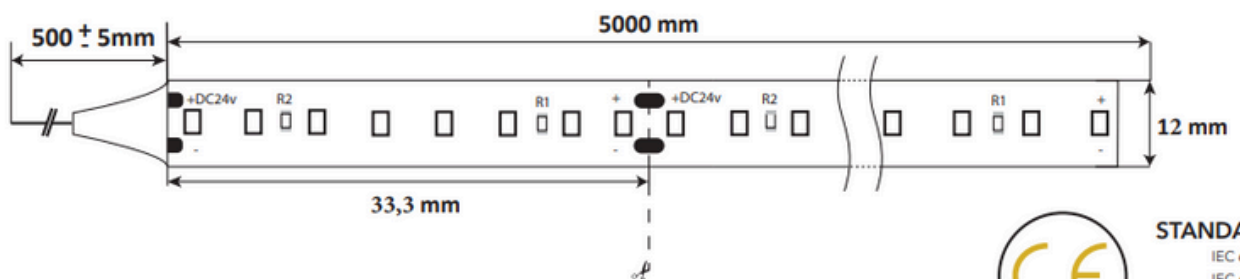

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2