

## FLEXIBLE LED RIBBONS 240LED/m - 19.8W/m



### General features




Models	FLEXA
Voltage (V)	24
Number of LED/m	240
LED package	2835
Angle (°)	120
Secability (cm)	3,33
IP index	20
Width (mm)	12
Double-face adhesive	3M
Max. length in serie (m)	5

### Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000385	19,8	2200	90+	3010
FLEXA-0000386	19,8	2700	95+	3110
FLEXA-0000387	19,8	3000	95+	3210
FLEXA-0000388	19,8	3500	95+	3305
FLEXA-0000389	19,8	4000	95+	3405
FLEXA-0000390	19,8	6000	95+	3405

### Technical drawing

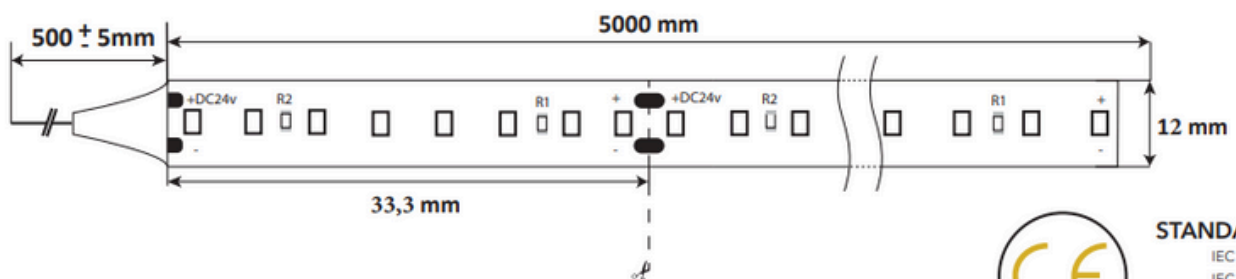

STANDARDS IEC  
IEC 62031  
IEC 62471  
IEC 62717  
IEC 61000-4-2