

## FLEXIBLE LED RIBBONS 240LED/m - 20W/m



### General features


Models	FLEXA
Voltage (V)	24
Number of LED/m	240
LED package	2216
Angle (°)	120
Secability (cm)	5
IP index	20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5



### Photometric characteristics

References	Power (W/m)	Color CCT1/CCT2 (°K)	CRI	Flux CCT1/CCT2 (Lm/m)
FLEXC-0000005	20	2200/3100	93	480/1040

### Technical drawing

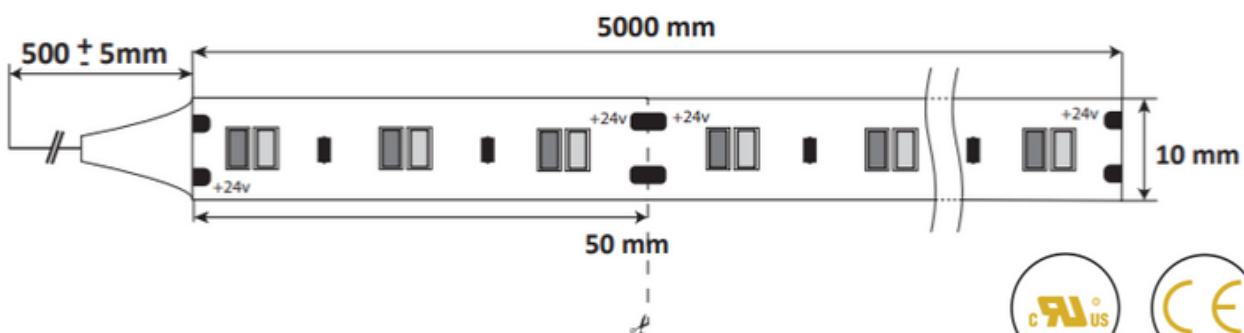

STANDARDS IEC  
IEC 62031  
IEC 62471  
IEC 62717  
IEC 61000-4-2