

FLEXIBLE COB BI-WHITE LED RIBBONS - 20W/m



General features


Models	FLEXC
Voltage (V)	24
Number of LED/m	608
LED package	COB
Angle (°)	140
Secability (cm)	2,6
IP index	20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5



Photometric characteristics

References	Power (W/m)	Color CCT1/CCT2 (°K)	CRI	Flux CCT1/CCT2 (Lm/m)
FLEXC-0000016	20	2000/4000	90	650/900
FLEXC-0000018	20	2200/6000	90	800/900
FLEXC-0000020	20	2000/6500	90	650/950

Technical drawing

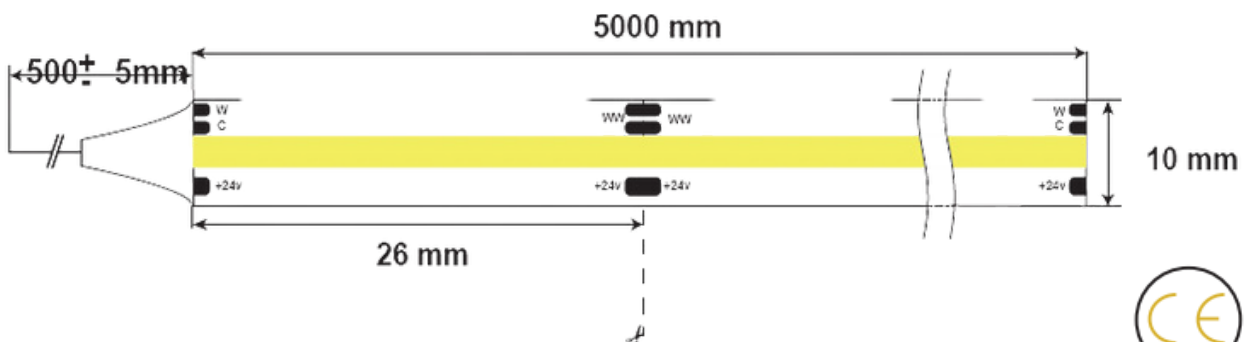

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2