


FLEXIBLE BI-WHITE LED RIBBONS - 180LED/m - 14W/m



General features


Models	FLEXC
Voltage (V)	24
Number of LED/m	180
LED package	2835
Angle (°)	120
Secability (cm)	1,11
IP index	20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5

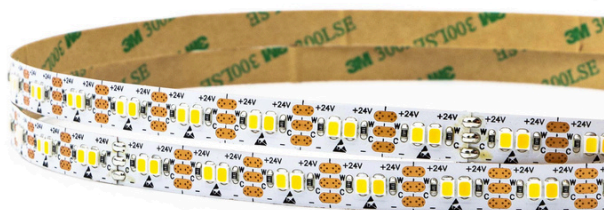

Photometric characteristics

References	Power (W/m)	Color CCT1/CCT2 (°K)	CRI	Flux CCT1/CCT2 (Lm/m)
FLEXC-0000022	14	2700/5000	90	550/600

Technical drawing

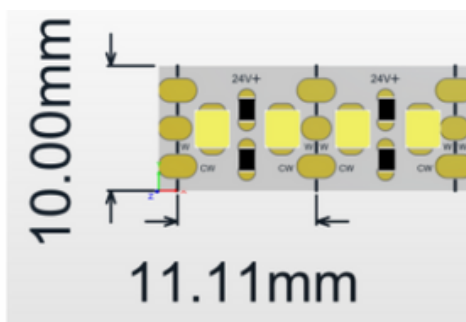

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2