

FLEXIBLE LED RIBBONS 144LED/m - 19,2W/m



General features


Models	FLEXD
Voltage (V)	24
Number of LED/m	144
LED package	4242
Angle (°)	120
Secability (mm)	41,66
IP index	20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5



Photometric characteristics

References	Power (W/m)	Color	Flux RGB (Lm/m)
FLEXD-0000012	19,2	RGB	R: 210 G: 400 B: 135

Technical drawing

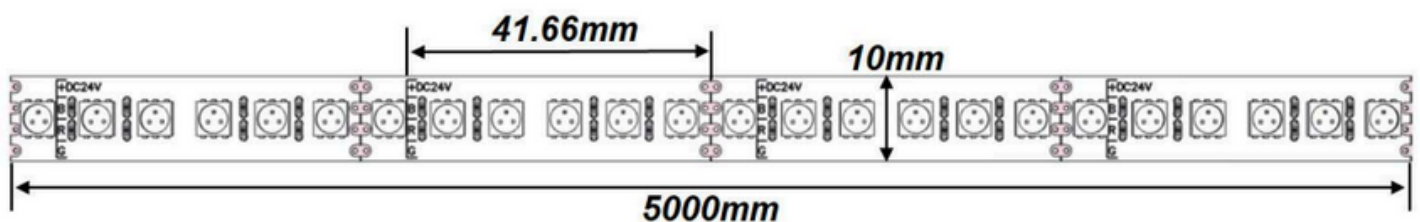

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2