

FLEXIBLE RGB COB LED RIBBONS -20W/m



General features


Models	FLEXD
Voltage (V)	24
Number of LED/m	1008
LED package	COB
Angle (°)	180
Secability (cm)	5
IP index	20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5



Photometric characteristics

References	Power (W/m)	Color	Flux RGB (Lm/m)
FLEXD-0000011	20	RGB	R: 360 G: 600 B: 280

Technical drawing

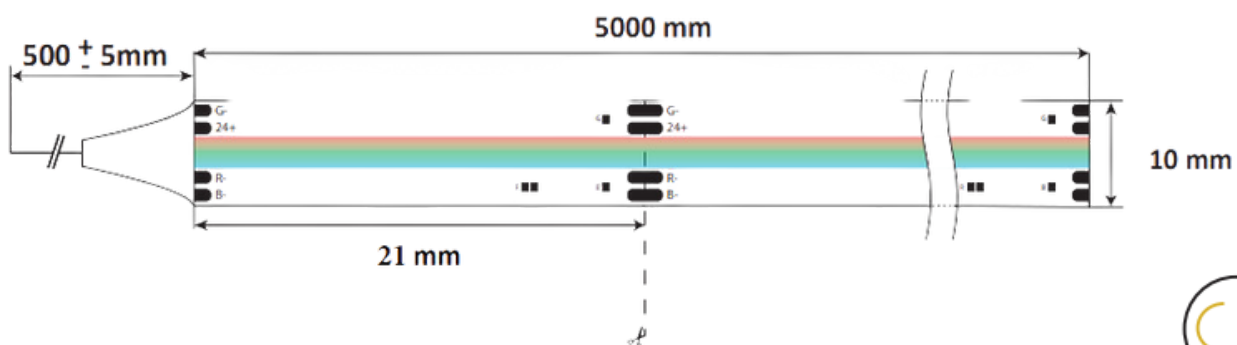

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2