

FLEXIBLE RGB LED RIBBONS 120LED/m - 14,4W/m



General features


Models	FLEXD
Voltage (V)	24
Number of LED/m	120
LED package	4242
Angle (°)	120
Secability (cm)	5
IP index	65
Width (mm)	8
Double-face adhesive	3M
Max. length in serie (m)	5



Photometric characteristics

References	Power (W/m)	Color	Flux RGB (Lm/m)
FLEXD-0000015	14,4	RGB	R: 144 G: 270 B: 90

Technical drawing

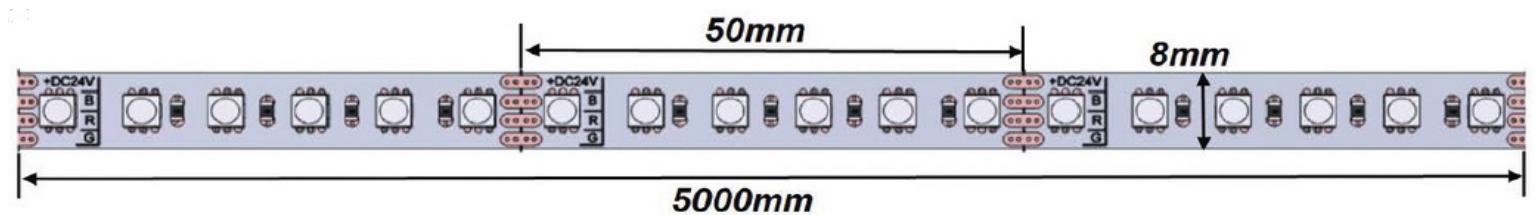

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2