

FLEXIBLE RGBW LED RIBBONS 60LED/m - 19W/m



General features


Models	FLEXE
Voltage (V)	24
Number of LED/m	60
LED package	5050
Angle (°)	120
Secability (cm)	10
IP index	20
Width (mm)	12
Double-face adhesive	3M
Max. length in serie (m)	5



Photometric characteristics

References	Power (W/m)	Color CCT (K°)	Flux RGBW (Lm/m)
FLEXE-0000001	19	RGB/3000	R: 122 G: 200 B: 80 W: 320
FLEXE-0000002	19	RGB/6000	R: 122 G: 200 B: 80 W: 360

Technical drawing

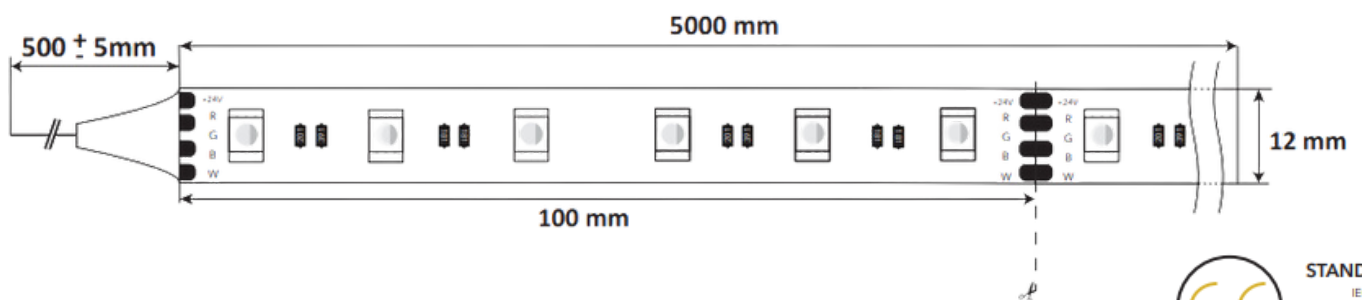

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2

