

FLEXIBLE RGBW LED RIBBONS 96LED/m - 30W/m



General features


Models	FLEXE
Voltage (V)	24
Number of LED/m	96
LED package	5050
Angle (°)	120
Secability (cm)	6,3
IP index	20
Width (mm)	12
Double-face adhesive	3M
Max. length in serie (m)	5



Photometric characteristics

References	Power (W/m)	Color CCT (K°)	Flux RGBW (Lm/m)
FLEXE-0000003	30	RGB/3000	R: 290 G: 390 B: 200 W: 520
FLEXE-0000004	30	RGB/6000	R: 290 G: 390 B: 200 W: 600

Technical drawing

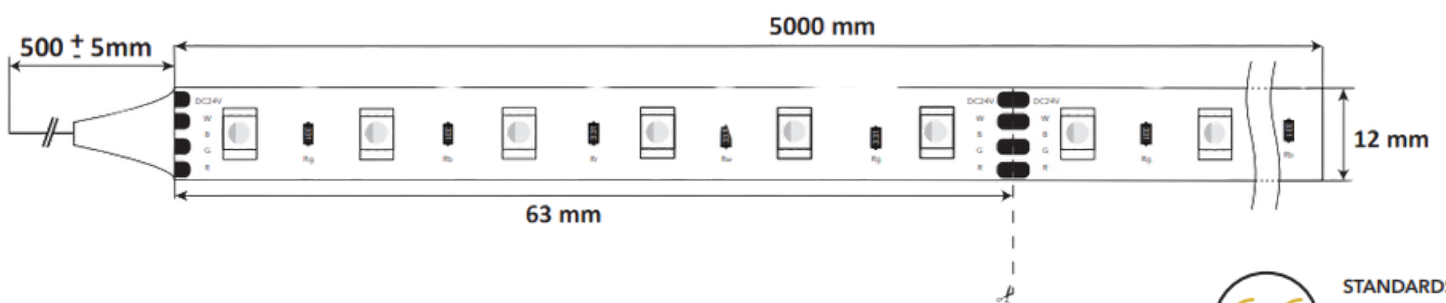

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2