

FLEXIBLE RGBW COB LED RIBBONS 20W/m



General features


| Models | FLEXE |
|--------------------------|-------|
| Voltage (V) | 24 |
| Number of LED/m | 1240 |
| LED package | COB |
| Angle (°) | 140 |
| Secability (cm) | 2,27 |
| IP index | 20 |
| Width (mm) | 12 |
| Double-face adhesive | 3M |
| Max. length in serie (m) | 5 |



Photometric characteristics

| References | Power (W/m) | Color CCT (K°) | White CRI | Flux RGBW (Lm/m) |
|---------------|-------------|----------------|-----------|-----------------------------------|
| FLEXE-0000012 | 20 | 3000 | 90 | R: 280 G: 480 B: 220 W: 520 |
| FLEXE-0000013 | 20 | 4000 | 90 | R: 280 G: 480 B: 220 W: 580 |
| FLEXE-0000014 | 20 | 6000 | 90 | R: 280 G: 480 B: 220 W: 580 |

Technical drawing

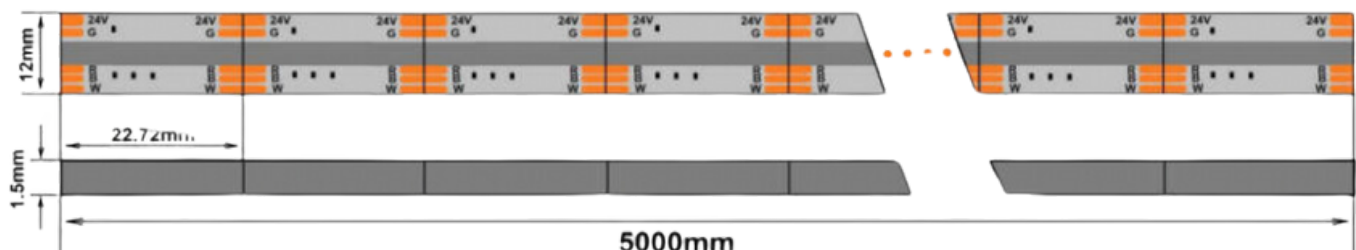

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2