

## FLEXIBLE RGBW COB LED RIBBONS - 960LED - 20W/m



### General features


Models	FLEXE
Voltage (V)	24
Number of LED/m	960
LED package	COB
Angle (°)	120
Secability (cm)	3,33
IP index	20
Width (mm)	12
Double-face adhesive	3M
Max. length in serie (m)	5



### Photometric characteristics

References	Power (W/m)	Color CCT (K°)	White CRI	Flux RGBW (Lm/m)
FLEXE-0000016	20	3000	90	R: 170   G: 350   B: 100   W: 1100
FLEXE-0000017	20	4000	90	R: 170   G: 350   B: 100   W: 1150
FLEXE-0000018	20	6000	90	R: 170   G: 350   B: 100   W: 1200

### Technical drawing

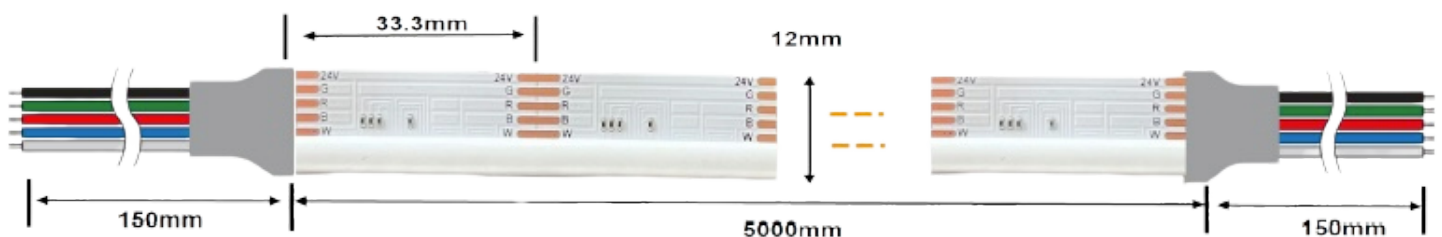

STANDARDS IEC  
IEC 62031  
IEC 62471  
IEC 62717  
IEC 61000-4-2