

FLEXIBLE RGB CW+WW LED RIBBONS 120LED/m - 20W/m



General features


Models	FLEXEE
Voltage (V)	24
Number of LED/m	120
LED package	5050
Angle (°)	120
Secability (cm)	5
IP index	20
Width (mm)	12
Double-face adhesive	3M
Max. length in serie (m)	5



Photometric characteristics

References	Power (W/m)	Color CCT (K°)	White CRI	Flux RGBW (Lm/m)
FLEXEE-0000003	24	2700/6000	90	R: 150 G: 290 B: 100 W: 330 A: 360

Technical drawing

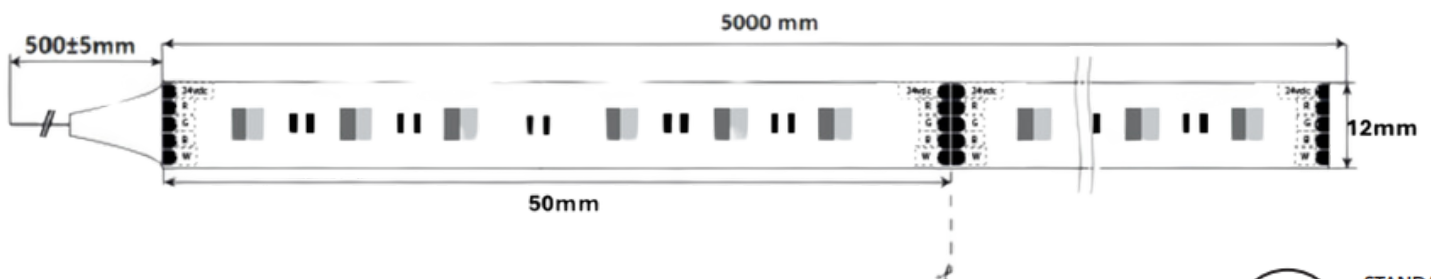

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2