


FLEXIBLE LED RIBBONS Pixel White 60LED/m - 14W/m



General features


Models	FLEXF
Voltage (V)	12-24
Protocol	SK6812
Number of LED/m	60
Number of pixel/m	60
LED package	5050
Angle (°)	120
Secability (cm)	10
IP index	20
Width (mm)	12
Double-face adhesive	3M
Max. length in serie (m)	5

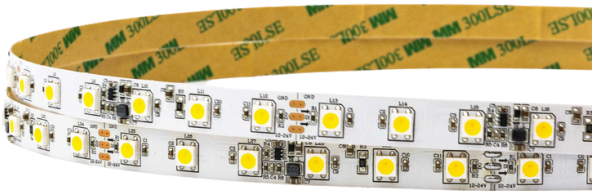

Photometric characteristics

References	Power (W/m)	CCT White (K°)	CRI	Flux (Lm/m)
FLEXF-0000011	14	3000	80	990
FLEXF-0000012	14	4000	80	1050
FLEXF-0000013	14	6000	80	1050

Technical drawing

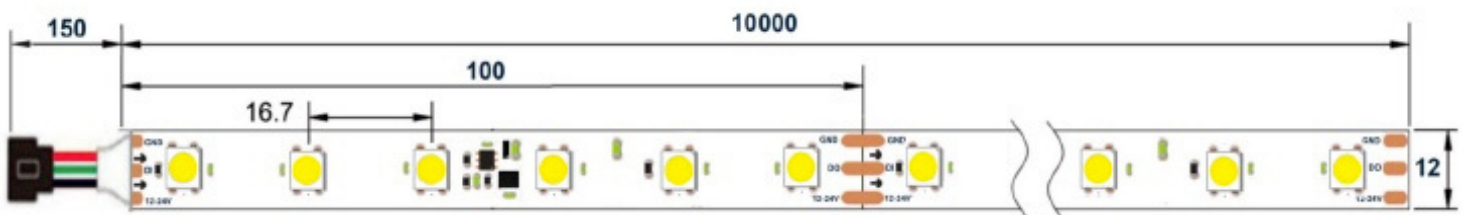

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2