

FLEXIBLE LED RIBBONS Pixel White 144LED/m - 29W/m



General features




Models	FLEXF
Voltage (V)	5
Number of LED/m	144
LED package	5050
Angle (°)	120
Secability (cm)	0,7
IP index	20
Width (mm)	12
Double-face adhesive	3M
Max. length in serie (m)	1

Photometric characteristics

References	Power (W/m)	CCT White (K°)	CRI	Flux (Lm/m)
FLEXF-0000007	29	3000	80	1720
FLEXF-0000008	29	4200	80	1780
FLEXF-0000009	29	6000	80	1880

Technical drawing

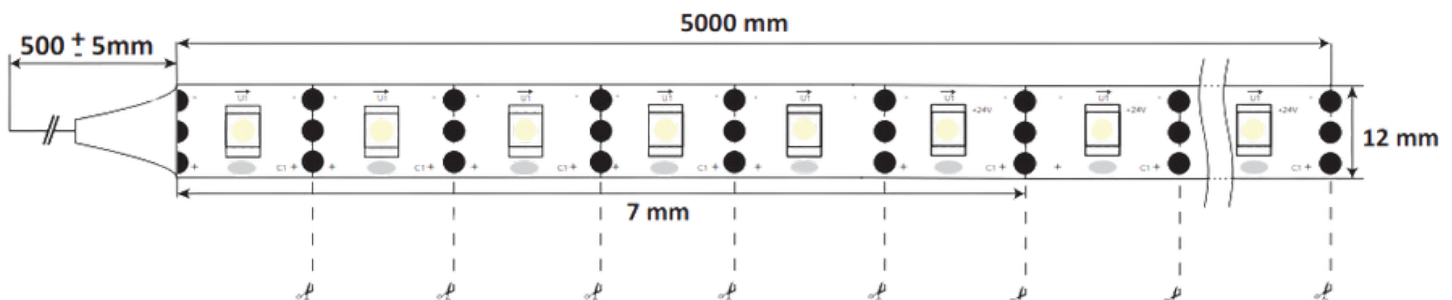

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2