

FLEXIBLE LED RIBBONS Pixel RGB 32LED/m - 8,5W/m



General features




| Models | FLEXG |
|--------------------------|----------------|
| Voltage (V) | 5 |
| Number of LED/m | 32 |
| LED package | 5050 |
| Angle (°) | 120 |
| Secability (cm) | 3,15 |
| IP index | 20 |
| Width (mm) | 12 |
| Double-face adhesive | 3M |
| Max. length in serie (m) | 5 |
| PCB Color | White or Black |

Photometric characteristics

| References | Power (W/m) | Color | Protocol | Flux (Lm/m) |
|---------------|-------------|-------|----------|-----------------------|
| FLEXG-0000001 | 8,5 | RGB | WS2811 | R: 37 G: 85 B: 18 |

Technical drawing

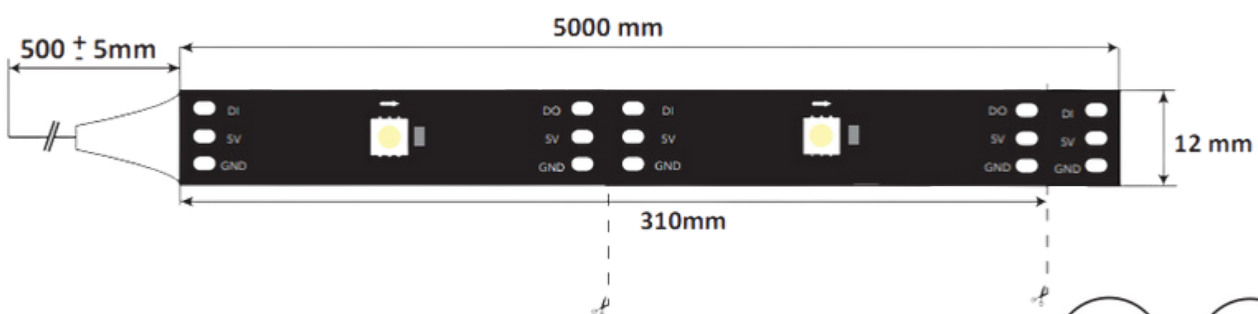

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2