

## FLEXIBLE LED RIBBONS Pixel RGB 32LED/m - 8,5W/m



### General features




Models	FLEXG
Voltage (V)	5
Number of LED/m	32
LED package	5050
Angle (°)	120
Secability (cm)	3,15
IP index	20
Width (mm)	12
Double-face adhesive	3M
Max. length in serie (m)	5
PCB Color	White or Black

### Photometric characteristics

References	Power (W/m)	Color	Protocol	Flux (Lm/m)
FLEXG-0000001	8,5	RGB	WS2811	R: 37   G: 85   B: 18

### Technical drawing

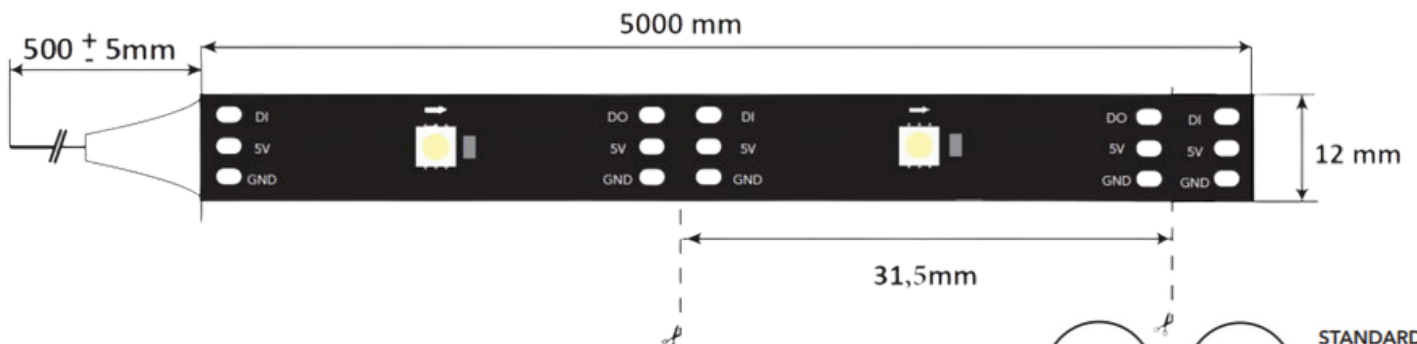

STANDARDS IEC  
IEC 62031  
IEC 62471  
IEC 62717  
IEC 61000-4-2