


## FLEXIBLE LED RIBBONS Pixel RGB 60LED/m - 9W/m



### General features

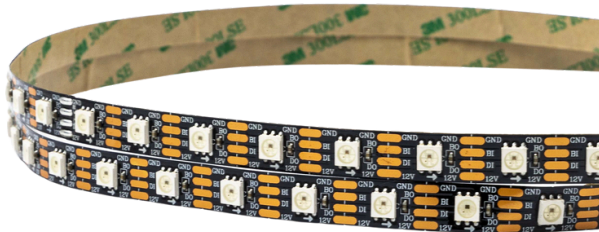


Models	FLEXG
Voltage (V)	12
Number of LED/m	60
LED package	5050
Angle (°)	120
Secability (cm)	3.3
IP index	20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	5
PCB Color	White

### Photometric characteristics

References	Power (W/m)	Color	Protocol	Flux (Lm/m)
FLEXG-0000007	9	RGB	GS8208	R: 150   G: 300   B: 120

### Technical drawing

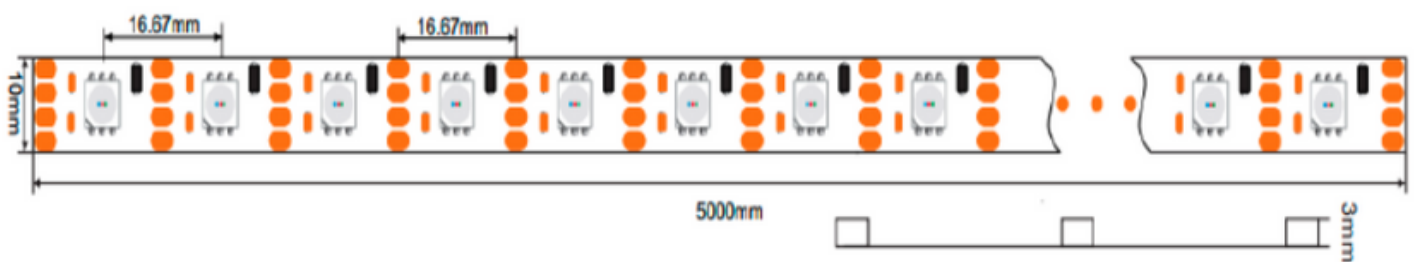

STANDARDS IEC  
IEC 62031  
IEC 62471  
IEC 62717  
IEC 61000-4-2