

FLEXIBLE LED RIBBONS Pixel RGB 96LED/m - 23W/m



General features


Models	FLEXG
Voltage (V)	12
Number of LED/m	96
LED package	5050
Angle (°)	120
Secability (cm)	1.06
IP index	20
Width (mm)	12
Double-face adhesive	3M
Max. length in serie (m)	2.5
PCB Color	White or Black



Photometric characteristics

References	Power (W/m)	Color	Protocol	Flux (Lm/m)
FLEXG-0000008	23	RGB	GS8208	R: 190 G: 450 B: 155

Technical drawing

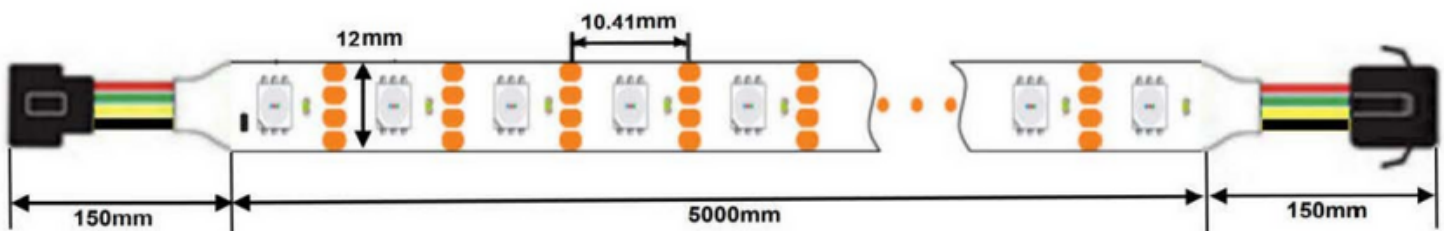

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2