

FLEXIBLE LED RIBBONS Pixel RGB 60LED/m - 14W/m



General features




Models	FLEXG
Voltage (V)	12-24
Number of LED/m	60
LED package	5050
Angle (°)	120
Secability (cm)	10
IP index	20
Width (mm)	12
Double-face adhesive	3M
Max. length in serie (m)	10
PCB Color	White or Black

Photometric characteristics

References	Power (W/m)	Color	Protocol	Flux (Lm/m)
FLEXG-0000009	14	RGB	SK6812	R: 200 G: 350 B: 150

Technical drawing

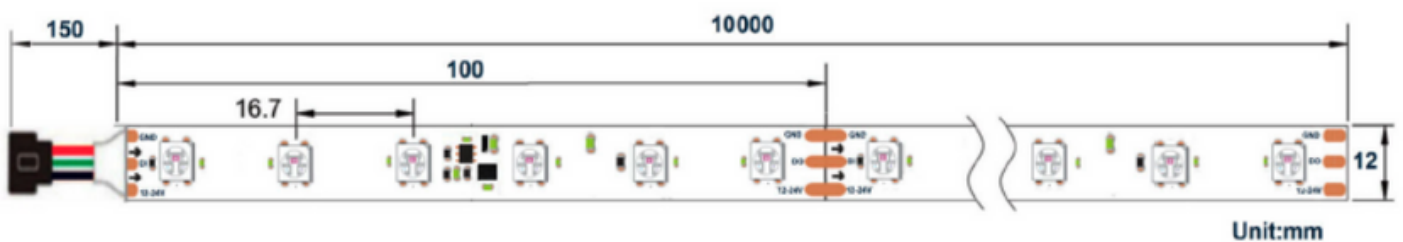

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2